



INSTALLATION INSTRUCTIONS

Console Safe #409-01

2023+ Chevy Colorado/GMC Canyon Console Safe

See tuffyprompts.com for Fitment Guide

QC CHECK

____ SHIP PACK CONTENTS
____ VISUAL INSPECTION
____ LOCK FUNCTION TEST
____ RUBBER SEAL
____ SHIPPING PACKAGE
____ PLATE BUNDLE


Please read and fill out the enclosed warranty registration card or register online at <https://tuffyprompts.com/help/warranty-information/warranty-registration/> to activate your warranty.

PARTS CHECKLIST



#409 Console Safe

SHIPPING PACKAGE CHECKLIST



#1 (4) #12 X 3/8"
Sheet Metal Screw

TOOLS CHECKLIST

- Phillips Head Screwdriver

PLEASE READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING INSTALLATION.

1. Remove all contents from the shipping box and confirm that you have all the components listed above.
2. Lower the Console Safe into the console allowing it to rest on the four corner shelves.

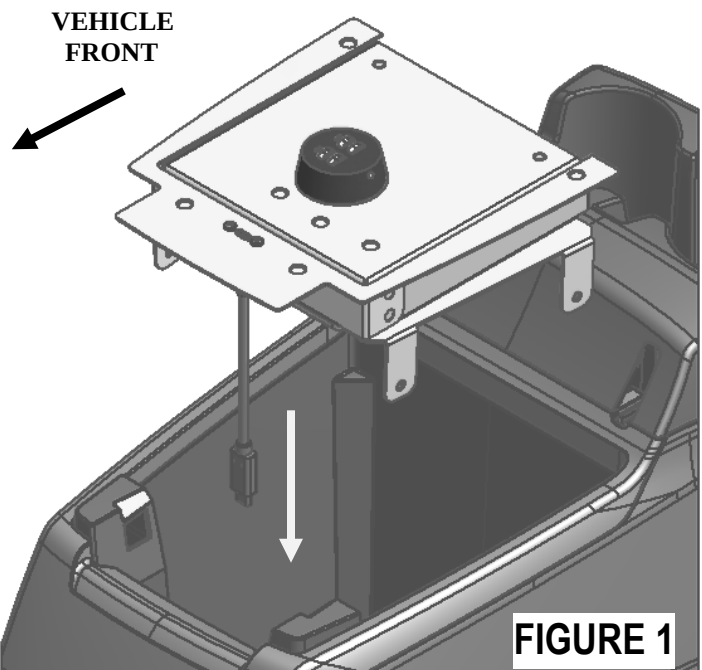


FIGURE 1

3. With a Philips Head Screwdriver press and screw the (4) **#1 Sheet Metal Screws** through the holes in the mounting brackets. (See Figure 2)
 - **Optional Step:** Mark through the mounting bracket holes and pre-drill the holes with a 1/8" drill bit.


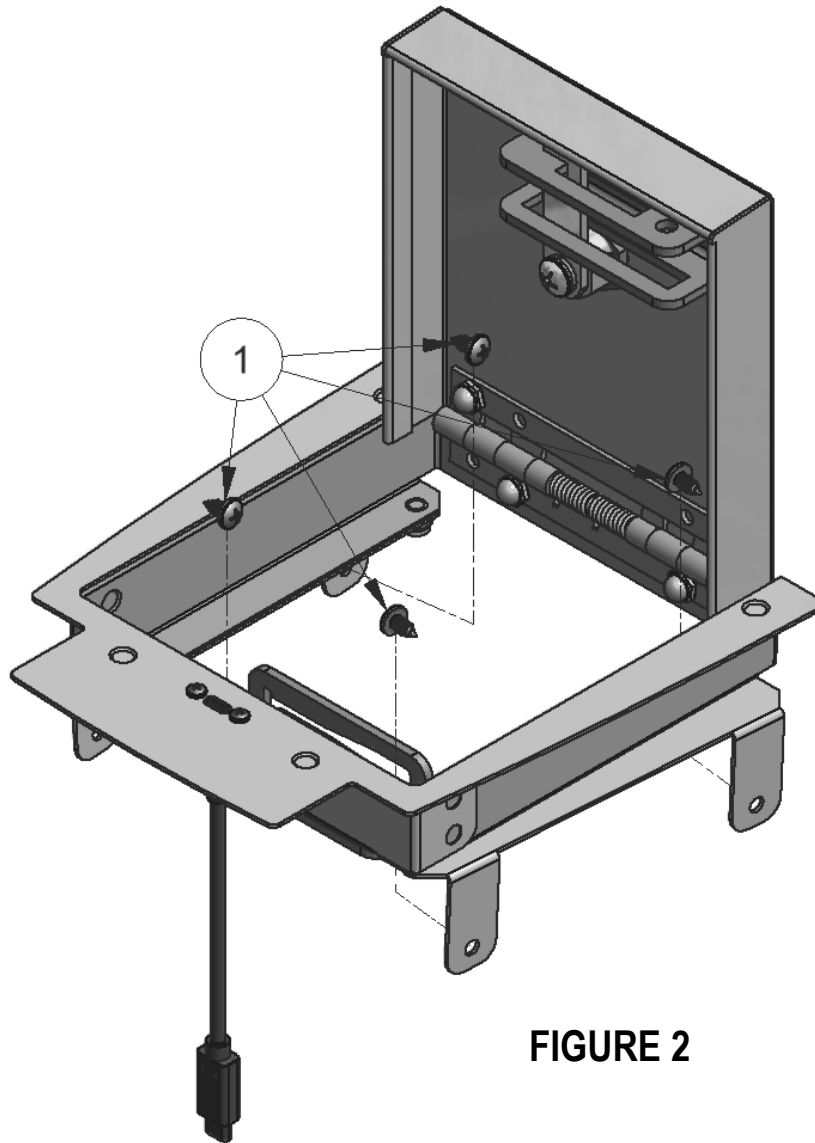


FIGURE 2

4. If a USB-C port is present, plug the free end of the USB-C extension into the port.
5. You have successfully installed your console safe.

6. Instructions for setting your personal combination:

- A. The combination is factory set at >>0-0-0<<
- B. Combination must be on opening number prior to resetting.
- C. On the underside outer edge of the lock there is a hole for the code reset button. Rotate the face of cam until the code reset button comes into view.
- D. Push the code reset button in with a paper clip and keep it pushed in!
- E. Set your personal combination by turning the dials to the desired combination – starting with the dial marked '1', and moving to '2', '3', and then '4'.
- F. Release the code reset button and your combination is set.
- G. To lock, rotate lock to "locked" position. Rotate one or more dials after lock is closed.
- H. To open the lock, turn dials to your personal combination.

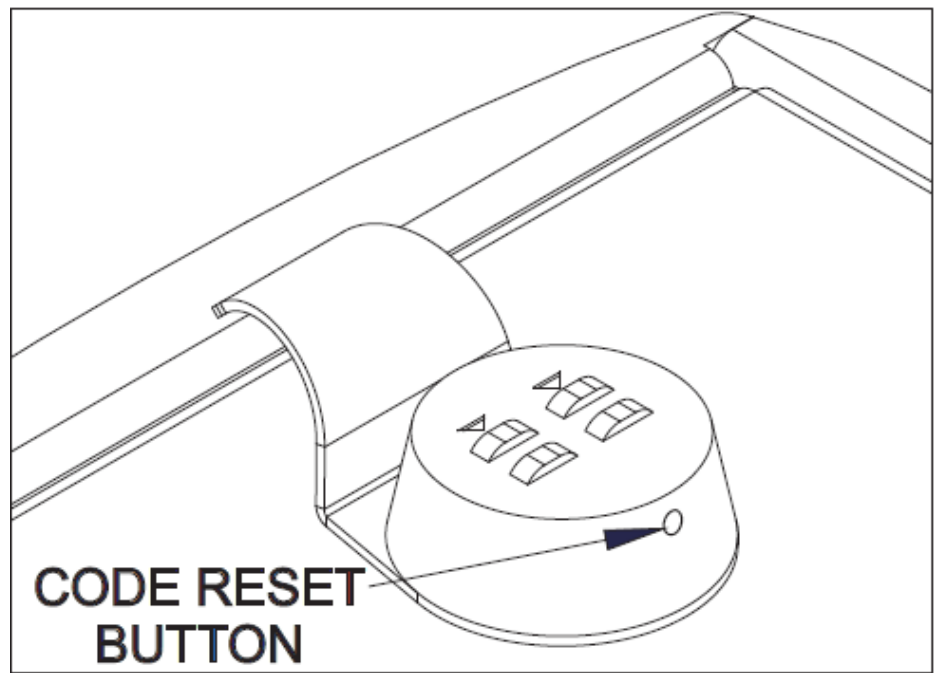

NOTE: If you desire, the Combi-Cam can be installed such that it is non-resettable.

Directions:

Take off the screw to the cam and remove the cam and the "stop cam"
Rotate the cylinder 180 degrees and then put the "stop cam" and the cam back on